

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of:

Sani AROMAA et al.

Application No.: New Application

Filed: Concurrently Hereiwith

Attorney Dkt. No.: 60091.00263

For: METHOD FOR SUPPRESSING INTERFERENCE AND ARRANGEMENT FOR
SAME, AND RADIO COMMUNICATIONS RECEIVER

CLAIM FOR PRIORITY UNDER 35 USC § 119

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

February 12, 2004

Sir:

The benefit of the filing dates of the following prior foreign application filed in the following foreign country is hereby requested for the above-identified patent application and the priority provided in 35 U.S.C. §119 is hereby claimed:


Finnish Patent Application No. 20031492 filed on 13 October 2003 in Finland

In support of this claim, certified copy of said original foreign application is filed herewith.

It is requested that the file of this application be marked to indicate that the requirements of 35 U.S.C. §119 have been fulfilled and that the Patent and Trademark Office kindly acknowledge receipt of this document.

Please charge any fee deficiency or credit any overpayment with respect to this paper to Counsel's Deposit Account No. 50-2222.

Respectfully submitted,



Douglas H. Goldhush
Registration No. 33,125

Customer No. 32294
SQUIRE, SANDERS & DEMPSEY LLP
14TH Floor
8000 Towers Crescent Drive
Tysons Corner, Virginia 22182-2700
Telephone: 703-720-7800
Fax: 703-720-7802

DHG:lls

Enclosure: Priority Document (1)

PATENTTI- JA REKISTERIHALLITUS
NATIONAL BOARD OF PATENTS AND REGISTRATION

Helsinki 27.10.2003

ETUOIKEUSTODISTUS
PRIORITY DOCUMENT



Hakija
Applicant

Nokia Corporation
Helsinki

Patenttihakemus nro
Patent application no

20031492

Tekemispäivä
Filing date

13.10.2003

Kansainvälinen luokka
International class


H04B

Keksinnön nimitys
Title of invention

"A method and an arrangement for interference suppression in a radio communications receiver"
(Häiriönpoistomenetelmä ja -järjestely radioliikennevastaanottimessa)

Täten todistetaan, että oheiset asiakirjat ovat tarkkoja jäljennöksiä Patentti- ja rekisterihallitukselle alkuaan annetuista selityksestä, patenttivaatimuksista, tiivistelmästä ja piirustuksista.

This is to certify that the annexed documents are true copies of the description, claims, abstract and drawings originally filed with the Finnish Patent Office.


Pirjo Kaila
Tutkimussihteeri

Maksu 50 €
Fee 50 EUR

Maksu perustuu kauppa- ja teollisuusministeriön antamaan asetukseen 1027/2001 Patentti- ja rekisterihallituksen maksullisista suoritteista muutoksineen.

The fee is based on the Decree with amendments of the Ministry of Trade and Industry No. 1027/2001 concerning the chargeable services of the National Board of Patents and Registration of Finland.

Osoite: Arkadiankatu 6 A Puhelin: 09 6939 500 Telefax: 09 6939 5328
P.O.Box 1160 Telephone: + 358 9 6939 500 Telefax: + 358 9 6939 5328
FIN-00101 Helsinki, FINLAND

A method and an arrangement for interference suppression in a radio communications receiver

Field

The invention relates to a method for interference suppression in a radio communications receiver, an arrangement for interference suppression in a radio communications receiver, and a radio communications receiver.

Background

A radio communications receiver can sustain interference to some degree. If the power of the interference exceeds the processing gain of the system, additional interference suppression is needed.

The performance of the traditional FFT-based (Fast Fourier Transform) exciser is adequate against stationary interference, i.e. such interference whose frequency contents do not change over the observation interval.

For other types of interference another transform might be more suitable. Several types of interference suppression methods have been investigated in different interfering environments. The problem is how to choose either in advance or adaptively the most efficient interference suppression for the interference type present in the channel.

A general solution for interference suppression is the Recursive Least Squares (RLS) adaptive filter. The problem of using the RLS filter is the computational complexity, numerical properties in fixed-point implementation and initialization.

Bank-type solutions have also been presented in the literature. For every interference suppression method included in the bank the interference suppression is performed completely including the inverse transform, and the best method is chosen based on some criterion, for example signal-to-interference-plus-noise ratio (SINR). Bank-type solutions therefore include lots of excessive computation.

Brief description of the invention

The invention seeks to provide an improved method for interference suppression in a radio communications receiver, an improved arrangement for interference suppression in a radio communications receiver, and an improved radio communications receiver.

According to an aspect of the invention, there is provided a method for interference suppression in a radio communications receiver, the method comprising: computing at least one transform of a received, analogue-to-digital converted radio signal; computing metrics defining the concentration of the interference present for both the transformed radio signal and the non-transformed radio signal; selecting the transform whose metrics indicate the highest concentration of the interference in the transfer domain as the used transform, or selecting no transform in case the metrics indicate the highest concentration of the interference for the non-transformed signal; suppressing the localized interference from the transformed radio signal by using weighting and computing inverse transform of the transformed radio signal in case the transform was selected, or suppressing the localized interference from the non-transformed radio signal by using weighting in case no transform was selected; and detecting and decoding the interference suppressed radio signal.

According to another aspect of the invention, there is provided an arrangement for interference suppression in a radio communications receiver; the arrangement comprising: a transformer configured to compute a transform of a received, analogue-to-digital converted radio signal; an interference estimator configured to compute metrics defining the concentration of the interference present for both the transformed radio signal and the non-transformed radio signal; a selector connected to the interference estimator configured to select the transform whose metrics indicate the highest concentration of the interference in the transfer domain as the used transform, or to select no transform in case the metrics indicate the highest concentration of the interference for the non-transformed signal; an interference suppressor connected to the selector configured to suppress the localized interference from the transformed radio signal by using weighting in case the transform was selected, or to suppress the localized interference from the non-transformed radio signal by using weighting in case no transform was selected; and an inverse transformer connected to the interference suppressor configured to compute inverse transform of the transformed radio signal in case the transform was selected.

According to another aspect of the invention, there is provided a radio communications receiver, the receiver comprising: means for computing at least one transform of a received, analogue-to-digital converted radio signal; means for computing metrics defining the concentration of the interference present for both the transformed radio signal and the non-transformed radio

signal; means for selecting the transform whose metrics indicate the highest concentration of the interference in the transfer domain as the used transform, or for selecting no transform in case the metrics indicate the highest concentration of the interference for the non-transformed signal; means for suppressing
 5 the localized interference from the transformed radio signal by using weighting and for computing inverse transform of the transformed radio signal in case the transform was selected, or for suppressing the localized interference from the non-transformed radio signal by using weighting in case no transform was selected; and means for detecting and decoding the interference suppressed radio
 10 signal.

The invention provides an adaptive, general method for suppressing several types of interference. In the invention several transforms may be computed in parallel. The most suitable transform for the interference scenario or no transform is chosen based on the metrics defining the concentration of the
 15 interference present in the transformed or non-transformed signal block. The invented solution can be used for any number of different transforms that preserve signal energy. The invention provides the advantage that the interference suppression is adaptive: it adapts to suppress the interference with the best available strategy. The invention may be expanded to utilize an arbitrary
 20 number of transforms. The inverse transform and in some embodiments also the interference suppression is performed only after the transform choice, whereby computational load is reduced as compared to the bank-type solutions. The invention may be used to suppress interference external to the radio communications system used by the receiver. The invention may suppress
 25 chirp-type interference especially effectively.

List of drawings

In the following, the invention will be described in greater detail with reference to the embodiments and the accompanying drawings, in which

Figure 1 illustrates some parts of the radio communications receiver
 30 and an embodiment of an arrangement for interference suppression;

Figure 2 illustrates an embodiment of the arrangement for interference suppression using the Coding Gain;

Figure 3 is a flow diagram illustrating a method for interference suppression in the radio communications receiver;

35 Figure 4 illustrates an alternate embodiment of the arrangement for interference suppression using the Coding Gain;

Figure 5 illustrates an embodiment of the arrangement for interference suppression receiving control from the radio frequency part;

Figure 6 illustrates the concentration of the interference;

Figure 7 illustrates an embodiment of the arrangement for interference suppression using the Consecutive Mean Excision Algorithm; and

Figures 8, 9, 10 and 11 illustrate the performance of the proposed practice.

Description of embodiments

With reference to Figure 1, let us examine an example of a radio communications receiver. The communications system may be any known radio system where relatively narrow-band interference in comparison with the bandwidth of the received radio signal may be suppressed with the described action. Such broad-band radio systems include but are not limited to spread spectrum systems, either frequency hopping or direct sequence such as CDMA (Code Division Multiple Access) or WCDMA (Wideband CDMA), a wireless local area network (WLAN), such as defined by standards in 802.11 series of the IEEE (The Institute of Electrical and Electronics Engineers, Inc.), or a radio system utilizing OFDM (Orthogonal Frequency Division Multiplexing).

The receiver includes an antenna 100 and a radio frequency part 102 for the reception of the radio frequency signal from the radio path. The antenna 100 may be any suitable prior art antenna system. Although only a single antenna is illustrated in our example, the proposed arrangement is applicable also to receivers utilizing the diversity reception with multiple antennas. An analog radio frequency signal is received from the radio path by the antenna 100 and the radio frequency part 102. The radio frequency part 102 may include a filter, which prevents frequencies outside the desired frequency band, for example. Subsequently, the received radio signal is converted to an intermediate frequency or directly to baseband, in which form the signal is sampled and quantized and analogue-to-digital (A/D) converted in the A/D converter 104.

The receiver also includes an arrangement 106 for interference suppression. In our example the arrangement 106 is connected to the input of the signal detector and decoder 124 of the radio communications receiver. The signal detector and decoder 124 may be implemented according to the ways known in the art. The arrangement 106 may be implemented in various ways. The arrangement 106 includes processing blocks, memories and signal con-

nections. The arrangement may be implemented using one or more processors with software, but different hardware implementations are also possible, such as a circuit made of separate logic components, one or more application-specific integrated circuits (ASIC), or a field programmable gate array (FPGA).

5 A combination of these implementations is also possible. One possible implementation is such that static operations (transforms, for example) are computed using either ASICs or FPGAs, but adaptive computations are performed with the software run on digital signal processors (DSP). In selecting the implementation, a person skilled in the art will take into consideration for instance
10 the requirements set on the size and power consumption of the device, the required processing power, manufacturing costs and production volumes. Receiver may also include other parts, but as their structure and functions are well known in the art, they need not be further described here. Receiver may be a Rake receiver used in CDMA systems, for example.

15 Figure 1 illustrates an embodiment of an arrangement 106 for interference suppression. The incoming radio signal is branched into at least two branches: in the first branch no transform is performed, and in the second branch a transform is performed.

The arrangement 106 comprises a transformer 110 configured to
20 compute a transform of a received, analogue-to-digital converted radio signal. The arrangement 106 may also comprise a windowing block 108 that temporally windows the received radio signal before a transform computation.

The arrangement 106 comprises an interference estimator 112, 114
25 configured to compute metrics defining the concentration of the interference present for both the transformed radio signal and the non-transformed radio signal. In our example the interference estimator is illustrated as two separate blocks, one 114 in the first branch and the other 112 in the second branch, but it is clear that the interference estimator may be implemented as one block with two inputs, one for the non-transformed signal and the other for the transformed signal. The metrics defining the concentration of the interference may
30 define the power density concentration of the interference, for example.

The arrangement 106 comprises a selector 116 connected to the interference estimator 112, 114 configured to select the transform whose metrics indicate the highest concentration of the interference in the transfer domain as
35 the used transform, or to select no transform in case the metrics indicate the highest concentration of the interference for the non-transformed signal.

The arrangement 106 further comprises an interference suppressor 118, 120 connected to the selector 116 configured to suppress the localized interference from the transformed radio signal by using weighting in case the transform was selected, or to suppress the localized interference from the non-transformed radio signal by using weighting in case no transform was selected. Although in our example these interference suppressors 118, 120 are illustrated as separate blocks, one 120 in the first branch and the other 118 in the second branch, it is clear that the interference suppressor may be implemented as one block with two inputs, one for the non-transformed signal and the other for the transformed signal. The interference suppressor 118, 120 is configured to act on the incoming signal selected by the selector 116.

The arrangement 106 also comprises an inverse transformer 122 connected to the interference suppressor 118 configured to compute inverse transform of the transformed radio signal in case the transform was selected. In our example the inverse transformer 122 resides in the second branch.

After the interference has been suppressed from the received, analogue-to-digital converted radio signal, the interference-suppressed signal is fed into the input of the signal detector and decoder 124 of the radio communications receiver. Interference suppression is therefore performed on the non-detected and non-decoded signal.

Figure 6 illustrates the concentration of the interference. The received signal is illustrated on the X-axis. The received signal may be illustrated with the chips of the signal, for example. The amplitude of the received signal is illustrated on the Y-axis. The received signal naturally includes also, besides the desired signal, background noise and interference. Let us suppose that we have three transforms, one of them being no transform. The received signal 600 is the non-transformed signal, the received signal 602 is transformed with the first transform, and the received signal 604 is transformed with the second transform. The peaks of the received signals 600, 602, 604 are localized as interference. The width 610 of the interference in the non-transformed signal 600, the width 612 of the interference in the signal 602 transformed with the first transform, and the width 614 of the interference in the signal 604 transformed with the second transform can be compared. The width 614 of the interference in the signal 604 transformed with the second transform is the narrowest, which indicates that the second transform most effectively suppresses the interference. This is due to fact that in the received signal 604 the fewest

chips are affected by the interference and thus by the interference suppression. Some chips may be lost in the interference suppression, the fewer the better, but the coding of the payload signal protects the payload signal against such losses. It is therefore the responsibility of the signal detector and decoder
 5 124 to salvage the information possibly lost in the interference suppression.

In an embodiment, the interference estimator 112, 114 is configured to estimate the metrics as the Coding Gain (CG) of the time domain received signal. The term 'Coding Gain' does not refer to channel coding, but it is a measure of signal's smoothness: if all the samples are approximately at the
 10 same level, CG is small and if there are high peaks, CG is large. CG defines how well the interference is concentrated in the transformed signal in the transfer domain or in the non-transformed signal in the time domain. The Coding Gain has formerly been used in video coding, in laboratory research, to see how well the video signal is compressed with different coding techniques. The
 15 Coding Gain is described in the following publication: Kok C. W. & Nguyen T.Q. (1998) Multirate Filter Banks and Transform Coding Gain, IEEE Transactions on Signal Processing, vol. 46 no. 7, pp. 2041-2044.

Figure 2 illustrates an embodiment of the arrangement 106 for interference suppression using the Coding Gain. Basically the structure in Figure 2
 20 is the same as in Figure 1. However, a selector 220 has a more complicated structure than that 116 in Figure 1: it has four input lines. Other differences will be explained below.

The interference estimators 112, 114 have been replaced with interference estimators 200, 204, 214, 218 utilizing the Coding Gain.

25 In an embodiment the interference estimator 200, 204, 214, 218 is configured to compute the Coding Gain with the equation

$$CG = \frac{\frac{1}{N} \sum_{n=1}^N |r(n)|^2}{N \sqrt{\prod_{n=1}^N |r(n)|^2}}, \quad (1)$$

wherein N is the length of the block, and

30 $r(n)$ is the received radio signal sample. Also another equation giving the mathematically equivalent result may be used. The larger the metrics obtained from the equation 1, the higher the concentration of the interference is.

In an embodiment the selector 220 is further configured to examine the Coding Gain as relative magnitudes between different transforms, including non-transform, and the interference estimator 200, 204, 214, 218 is configured to compute the Coding Gain with the equation

$$CG' = \frac{1}{N \sqrt{\prod_{n=1}^N |r(n)|^2}}, \quad (2)$$

wherein N is the length of the block, and

$r(n)$ is the received radio signal sample. Also another equation giving the mathematically equivalent result may be used. The computations of the equation 2 are simpler than those of equation 1: instead of computing both the arithmetic mean and the geometric mean only the geometric mean needs to be computed. The simpler equation may be used, because the nominator, which represents the average power, is the same for all transforms preserving the energy of the received signal.

Figure 2 also illustrates an embodiment where three transforms are used: the transformer 202 uses the Fast Fourier Transform (FFT), the transformer 212 uses the Fractional Fourier Transform (FrFT), and the transformer 216 uses another transform having inverse transform and metrics defining the concentration of the interference present in the transformed radio signal. Such other transforms include the Discrete Cosine Transform (DCT), the Karhunen-Loeve Transform (KLT), and a wavelet transform. DCT and wavelet transform are described in literature, such as Gonzalez R. E. & Woods R. C. (2002) Digital Image Processing, pages 372-376 and 470-479. KLT is described also in literature, such as Haykin S. (1996) Adaptive Filter Theory, pages 175-176 and 460-461. Instead of two branches of Figure 1, there are now four branches in the arrangement 106. There is also an inverse transformer for each of the transforms: an inverse transformer 226 configured to compute inverse transform of the FFT, an inverse transformer 230 configured to compute inverse transform of the FrFT, and an inverse transformer 234 configured to compute inverse transform of the transform performed in the transformer 216.

In an embodiment the interference suppressor 222, 224, 228, 232 is configured to perform the suppression of the localized interference with the Consecutive Mean Excision Algorithm (CME). The use of the CME for interference suppression is described in the applicant's application WO 02/091610, incorporated herein by reference, and also in the following publication: Henttu

P. & Aromaa S. (2002) Consecutive Mean Excision Algorithm, Proceedings of IEEE International Symposium on Spread Spectrum Techniques and Applications, vol. 2, pp. 450-454.

Figure 2 thus illustrates also an embodiment, wherein the arrangement 106 comprises at least two transformers: the first transformer 202 is configured to use the FFT as the transform, and the second transformer 212 is configured to use the FrFT as the transform. In connection with this embodiment, it is also illustrated an embodiment, wherein the arrangement 106 also comprises a Consecutive Mean Excision Algorithm (CME) processor 206 connected to the first transformer 202 configured to perform for the FFT-transformed signal the CME in order to localize the interference, a bandwidth determiner 208 connected to the CME processor 206 configured to determine the bandwidth of the interference, and an order determiner 210 connected to the bandwidth determiner 208 and to the second transformer 212 configured to determine the order of the FrFT based on the bandwidth of the interference and to supply the order of the FrFT to the second transformer 212.

Figure 4 illustrates an alternate embodiment of the arrangement 106 of Figure 2. In this alternate embodiment the interference suppressor 224 is configured to perform the suppression of the localized interference from the transformed radio signal by using the results of the already performed CME in the CME processor 206 in case the FFT was selected as the transform. As illustrated in Figure 4 with the array 400 the CME processor 206 supplies the results of the performed CME to the interference suppressor 224. This embodiment reduces the needed processing capacity in the arrangement 106.

Figure 5 illustrates an embodiment of the arrangement 106 for interference suppression receiving control 500 from the radio frequency part 102. As was explained earlier with reference to Figure 1, the radio communications receiver comprises a radio frequency processing part 102. The arrangement 106 is configured to receive information 500 on interference present in the received radio signal from the radio frequency processing part 102 and to utilize the received information 500 in the interference estimator 112, 114 and the interference suppressor 118, 120 for localizing and suppressing the interference. Such interference may be burst-like, for example.

Figure 7 illustrates an embodiment of the arrangement 106 for interference suppression using the Consecutive Mean Excision Algorithm (CME). In this embodiment the interference estimators 200, 204, 214, 218 of Figure 2 are

replaced by interference estimators 700, 702, 704, 706 configured to calculate the metrics with the CME. Also the selector 220 of Figure 2 is replaced by a selector 708 operating with the results of the CME instead of the CG. The advantage of this embodiment is that, as can be seen from Figure 7, no separate
 5 interference suppressors 222, 224, 228, 232 as in Figure 2 after the selector 708 are needed. Blocks 700, 702, 704, 706 thus perform interference estimation, localization and suppression.

In an embodiment the interference estimator 700, 702, 704, 706 is further configured to determine with the CME background noise level of the
 10 received radio signal, and to localize as interference those parts of the signal exceeding the background noise level. In the example of Figure 6, the background noise level may be about at the amplitude 620.

Next, with reference to Figure 3 a method for interference suppression in the radio communications receiver is explained. The method is started
 15 in 300. Next, a radio signal is received in 302, and an A/D conversion is performed for the received signal in 304.

Then, at least one transform of a received, analogue-to-digital converted radio signal is computed. N transforms are computed in our example in
 20 306, 308. N is a positive integer that is bigger than one.

Next, for both the transformed radio signal and the non-transformed radio signal metrics defining the concentration of the interference present is
 25 computed in 310, 312, 314.

After that, in 316, the transform whose metrics indicate the highest concentration of the interference in the transfer domain is selected as the used
 25 transform, or no transform is selected in case the metrics indicate the highest concentration of the interference for the non-transformed signal.

In 318 and 320, the localized interference from the transformed radio signal is suppressed by using weighting and inverse transform of the transformed radio signal is computed in case the transform was selected, or, in 318,
 30 the localized interference is suppressed from the non-transformed radio signal by using weighting in case no transform was selected.

After the described interference suppression has been completed, the interference suppressed radio signal is detected and decoded in 322.

After all the received signals have been processed, the method may
 35 be ended in 324.

The method may be adapted according to the accompanying dependent method claims. As their contents have already been explained in connection with the arrangement 106, the explanation is not repeated here. It should be noted, however, that even though the method may be implemented with the described arrangement 106 it may also be implemented in other suitable radio receivers where the concentration of interference can be estimated and the interference located.

The performance of the proposed practice was evaluated through Monte Carlo computer simulations. The results of these simulations are illustrated in Figures 8, 9, 10 and 11. The proposed practice is denoted with PP, other practices are pure FFT with the CME-based interference suppression and pure FrFT with the CME-based interference suppression.

Figures 8 to 11 present the worst-case performance. A single channel FFT CME notch filter structure was used. Double channel FFT filter improves the performance by 2.5 decibels in terms of the SNR. The proposed practice also works with the double channel structure. The simulated communications system was a direct sequence spread spectrum radio system. The spreading code was 63-chip Gold code and the signal-to-noise ratio (SNR) was set to 15 decibels. Three interference scenarios - sinusoidal interference, chirp interference and raised cosine filtered binary phase shift keying (BPSK) modulated interference - were considered. The interference-to-signal power ratio (I/S) was set to 30 decibels except in one simulation where the I/S was set to be variable.

The performance is evaluated in the presence of multiple sinusoidal interference in Figures 8 and 9, and in the presence of band-limited communication signal interference in Figure 11. As can be seen from Figures 8, 9 and 11, the proposed practice is as good as the reference practice, i.e. the proposed practice manages to select the transform with which the interference can be most effectively suppressed.

The performance is evaluated in the presence of chirp interference in Figure 10. Here the results with the proposed practice are clearly better than with the two reference practices. It can be assumed that with the chirp-type interference the proposed practice adaptively and dynamically selects the most suitable transform for each situation.

Even though the invention is described above with reference to an example according to the accompanying drawings, it is clear that the invention

is not restricted thereto but it can be modified in several ways within the scope of the appended claims.



Claim

1. A method for interference suppression in a radio communications receiver, the method comprising:

5 computing at least one transform of a received, analogue-to-digital converted radio signal;

computing metrics defining the concentration of the interference present for both the transformed radio signal and the non-transformed radio signal;

10 selecting the transform whose metrics indicate the highest concentration of the interference in the transfer domain as the used transform, or selecting no transform in case the metrics indicate the highest concentration of the interference for the non-transformed signal;

15 suppressing the localized interference from the transformed radio signal by using weighting and computing inverse transform of the transformed radio signal in case the transform was selected, or suppressing the localized interference from the non-transformed radio signal by using weighting in case no transform was selected; and

detecting and decoding the interference suppressed radio signal.

20 2. The method of claim 1, wherein the metrics comprise the Coding Gain (CG).

3. The method of claim 2, wherein the Coding Gain is computed

with the equation
$$CG = \frac{\frac{1}{N} \sum_{n=1}^N |r(n)|^2}{N \sqrt{\prod_{n=1}^N |r(n)|^2}},$$

wherein N is the length of the block, and

r(n) is the received radio signal sample,

25 or with another equation giving the mathematically equivalent result.

4. The method of claim 2, wherein the Coding Gain is examined as relative magnitudes between different transforms, including non-transform, and

therefore computed with the equation
$$CG' = \frac{1}{N \sqrt{\prod_{n=1}^N |r(n)|^2}},$$

wherein N is the length of the block, and

30 r(n) is the received radio signal sample,

or with another equation giving the mathematically equivalent result.

5. The method of claim 1, wherein the metrics are calculated with the Consecutive Mean Excision Algorithm (CME).

6. The method of claim 5, further comprising: determining with the CME background noise level of the received radio signal, and localizing as interference those parts of the signal exceeding the background noise level.

7. The method of claim 1, wherein the transform comprises one of the Fast Fourier Transform (FFT), the Fractional Fourier Transform (FrFT), the Discrete Cosine Transform (DCT), the Karhunen-Loeve Transform, a wavelet transform, or another transform having inverse transform and metrics defining the concentration of the interference present in the transformed radio signal.

8. The method of claim 1, wherein the first transform is the Fast Fourier Transform (FFT), and the second transform is the Fractional Fourier Transform (FrFT).

9. The method of claim 8, further comprising:
performing for the FFT-transformed signal the Consecutive Mean Excision Algorithm (CME) in order to localize the interference and determine its bandwidth; and
selecting the order of the FrFT based on the bandwidth of the interference.

10. The method of claim 9, further comprising:
performing the suppression of the localized interference from the transformed radio signal by using the results of the already performed CME in case the FFT was selected as the transform.

11. The method of claim 1, wherein the suppression of the localized interference is performed with the Consecutive Mean Excision Algorithm (CME).

12. An arrangement for interference suppression in a radio communications receiver, the arrangement comprising:

a transformer configured to compute a transform of a received, analogue-to-digital converted radio signal;

an interference estimator configured to compute metrics defining the concentration of the interference present for both the transformed radio signal and the non-transformed radio signal;

a selector connected to the interference estimator configured to select the transform whose metrics indicate the highest concentration of the interference in the transfer domain as the used transform, or to select no transform

in case the metrics indicate the highest concentration of the interference for the non-transformed signal;

an interference suppressor connected to the selector configured to suppress the localized interference from the transformed radio signal by using weighting in case the transform was selected, or to suppress the localized interference from the non-transformed radio signal by using weighting in case no transform was selected; and

an inverse transformer connected to the interference suppressor configured to compute inverse transform of the transformed radio signal in case the transform was selected.

13. The arrangement of claim 12, wherein the interference estimator is further configured to estimate the metrics as the Coding Gain (CG).

14. The arrangement of claim 13, wherein the interference estimator is further configured to compute the Coding Gain with the equation

$$CG = \frac{\frac{1}{N} \sum_{n=1}^N |r(n)|^2}{N \sqrt{\prod_{n=1}^N |r(n)|^2}},$$

wherein N is the length of the block, and
r(n) is the received radio signal sample,
or with another equation giving the mathematically equivalent result.

15. The arrangement of claim 13, wherein the selector is further configured to examine the Coding Gain as relative magnitudes between different transforms, including non-transform, and the interference estimator is further configured to compute the Coding Gain with the equation

$$CG' = \frac{1}{N \sqrt{\prod_{n=1}^N |r(n)|^2}},$$

wherein N is the length of the block, and
r(n) is the received radio signal sample,
or with another equation giving the mathematically equivalent result.

16. The arrangement of claim 12, wherein the interference estimator is further configured to calculate the metrics with the Consecutive Mean Excision Algorithm (CME).

17. The arrangement of claim 16, wherein the interference estimator is further configured to determine with the CME background noise level of

the received radio signal, and to localize as interference those parts of the signal exceeding the background noise level.

18. The arrangement of claim 12, wherein the transformer is configured to use as the transform one of the Fast Fourier Transform (FFT), the Fractional Fourier Transform (FrFT), the Discrete Cosine Transform (DCT), the Karhunen-Loeve Transform, a wavelet transform, or another transform having inverse transform and metrics defining the concentration of the interference present in the transformed radio signal.

19. The arrangement of claim 12, wherein the arrangement comprises at least two transformers: the first transformer is configured to use the Fast Fourier Transform (FFT) as the transform, and the second transformer is configured to use the Fractional Fourier Transform (FrFT) as the transform.

20. The arrangement of claim 19, further comprising:

a Consecutive Mean Excision Algorithm (CME) processor connected to the first transformer configured to perform for the FFT-transformed signal the CME in order to localize the interference;

a bandwidth determiner connected to the CME processor configured to determine the bandwidth of the interference; and

an order determiner connected to the bandwidth determiner and to the second transformer configured to determine the order of the FrFT based on the bandwidth of the interference and to supply the order of the FrFT to the second transformer.

21. The arrangement of claim 20, wherein the interference suppressor is configured to perform the suppression of the localized interference from the transformed radio signal by using the results of the already performed CME in the CME processor in case the FFT was selected as the transform.

22. The arrangement of claim 12, wherein the interference suppressor is configured to perform the suppression of the localized interference with the Consecutive Mean Excision Algorithm (CME).

23. The arrangement of claim 12, wherein the radio communications receiver comprises a radio frequency processing part, and the arrangement is further configured to receive information on interference present in the received radio signal from the radio frequency processing part and to utilize the received information in the interference estimator and the interference suppressor for localizing and suppressing the interference.

24. The arrangement of claim 12, wherein the arrangement is connected to the input of the signal detector and decoder of the radio communications receiver.

25. A radio communications receiver, the receiver comprising:
- 5 means for computing at least one transform of a received, analogue-to-digital converted radio signal;
- means for computing metrics defining the concentration of the interference present for both the transformed radio signal and the non-transformed radio signal;
- 10 means for selecting the transform whose metrics indicate the highest concentration of the interference in the transfer domain as the used transform, or for selecting no transform in case the metrics indicate the highest concentration of the interference for the non-transformed signal;
- means for suppressing the localized interference from the transformed radio signal by using weighting and for computing inverse transform of
- 15 the transformed radio signal in case the transform was selected, or for suppressing the localized interference from the non-transformed radio signal by using weighting in case no transform was selected; and
- means for detecting and decoding the interference suppressed radio signal.
- 20

(57) Abstract

A method and an arrangement for interference suppression in a radio communications receiver. The method comprises: computing at least one transform of a received, analogue-to-digital converted radio signal; computing metrics defining the concentration of the interference present for both the transformed radio signal and the non-transformed radio signal; selecting the transform whose metrics indicate the highest concentration of the interference in the transfer domain as the used transform, or selecting no transform in case the metrics indicate the highest concentration of the interference for the non-transformed signal; suppressing the localized interference from the transformed radio signal by using weighting and computing inverse transform of the transformed radio signal in case the transform was selected, or suppressing the localized interference from the non-transformed radio signal by using weighting in case no transform was selected; and detecting and decoding the interference suppressed radio signal.

(Figure 3)

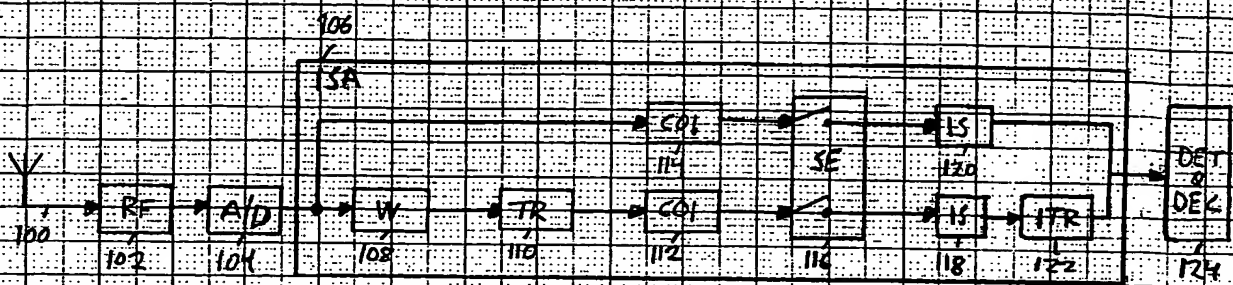


FIG. 1

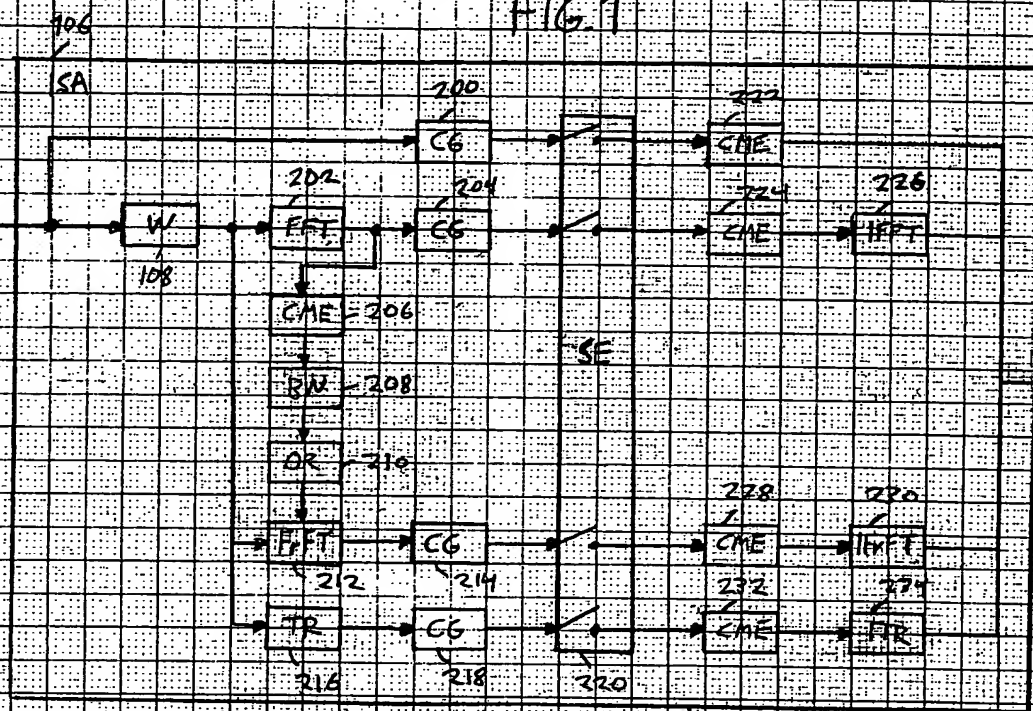


FIG. 2

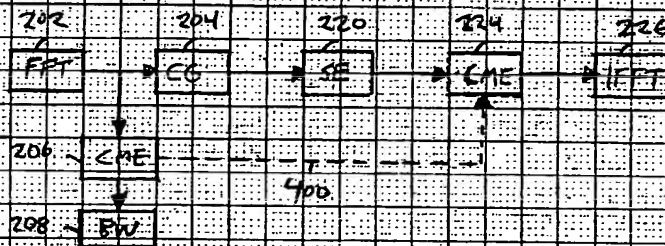


FIG. 4

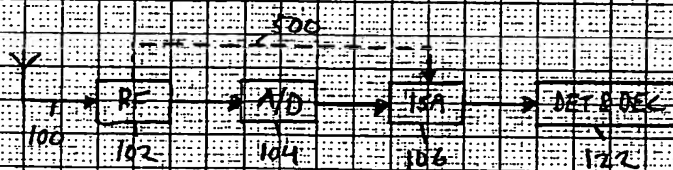


FIG 5



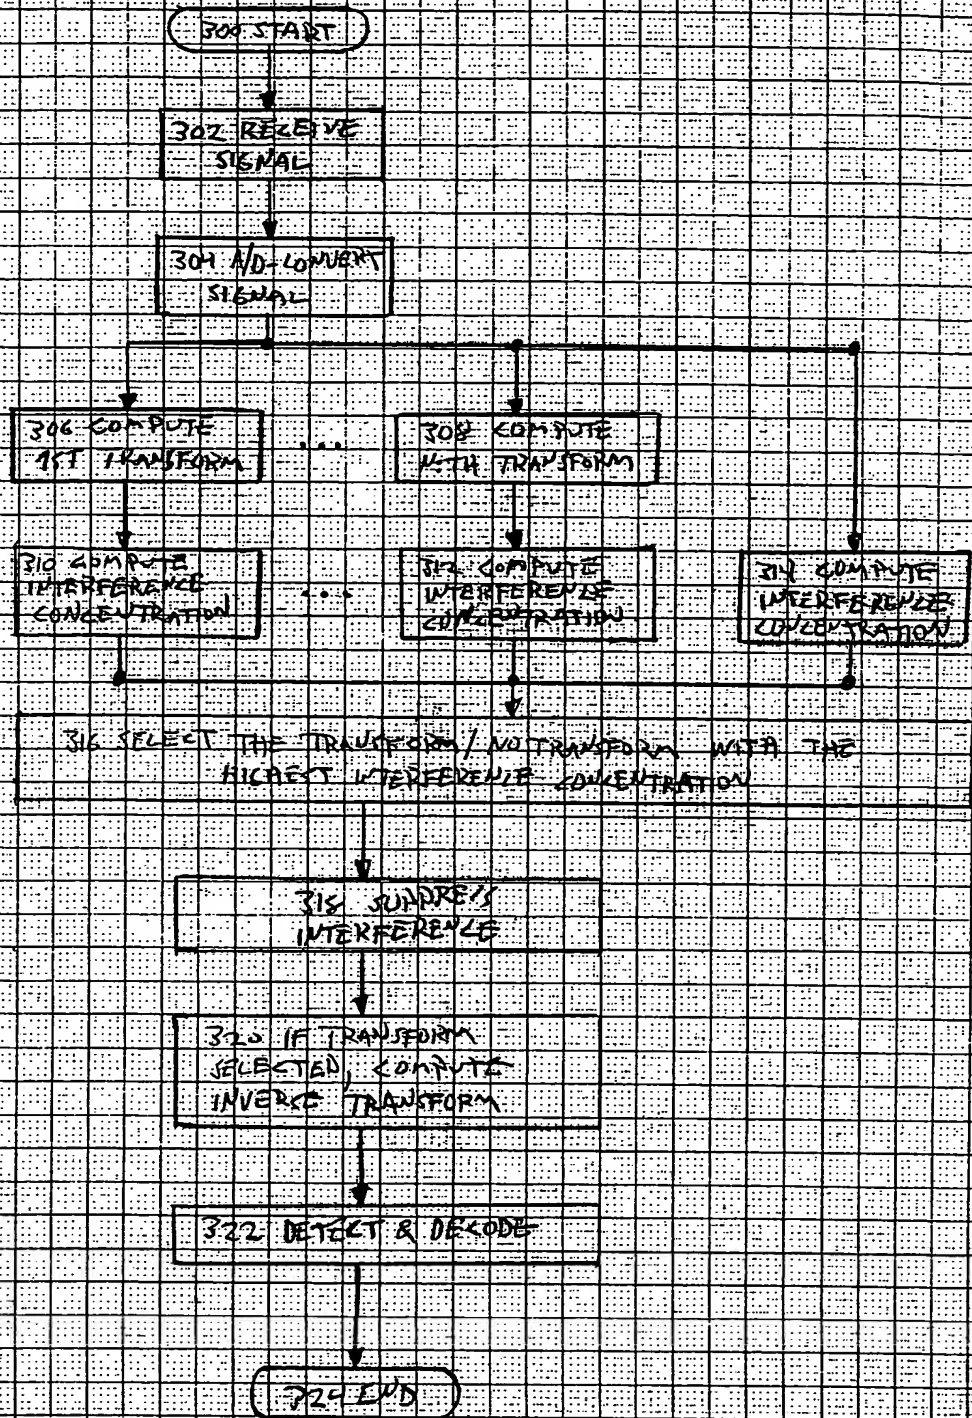


FIG. 3

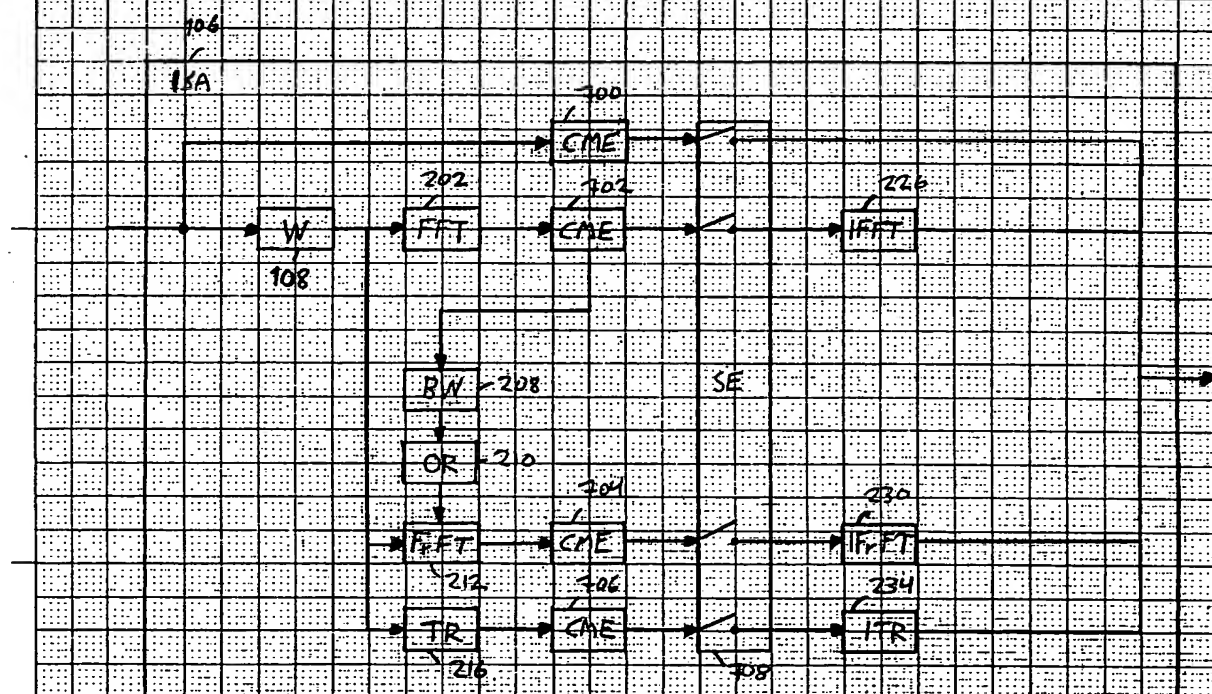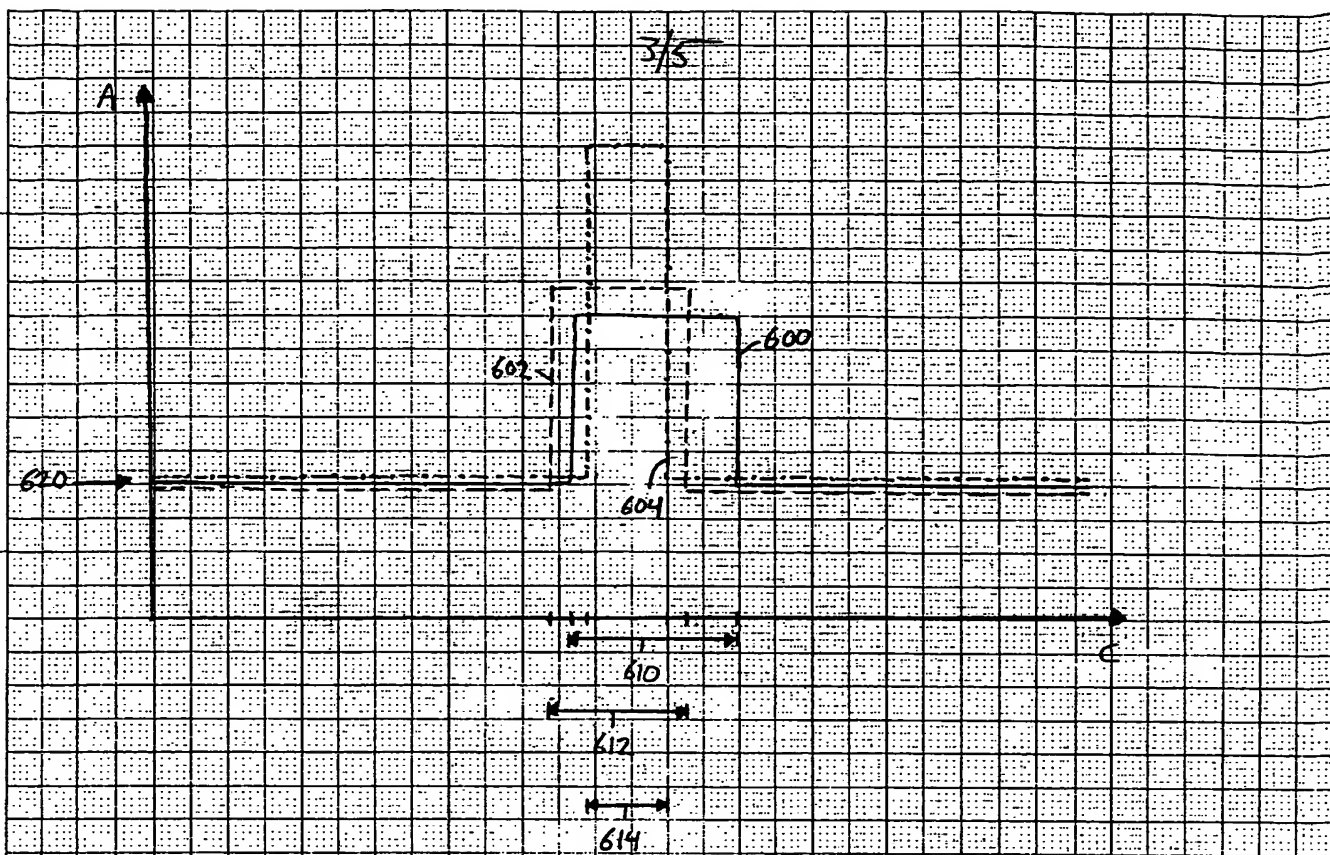

4/5

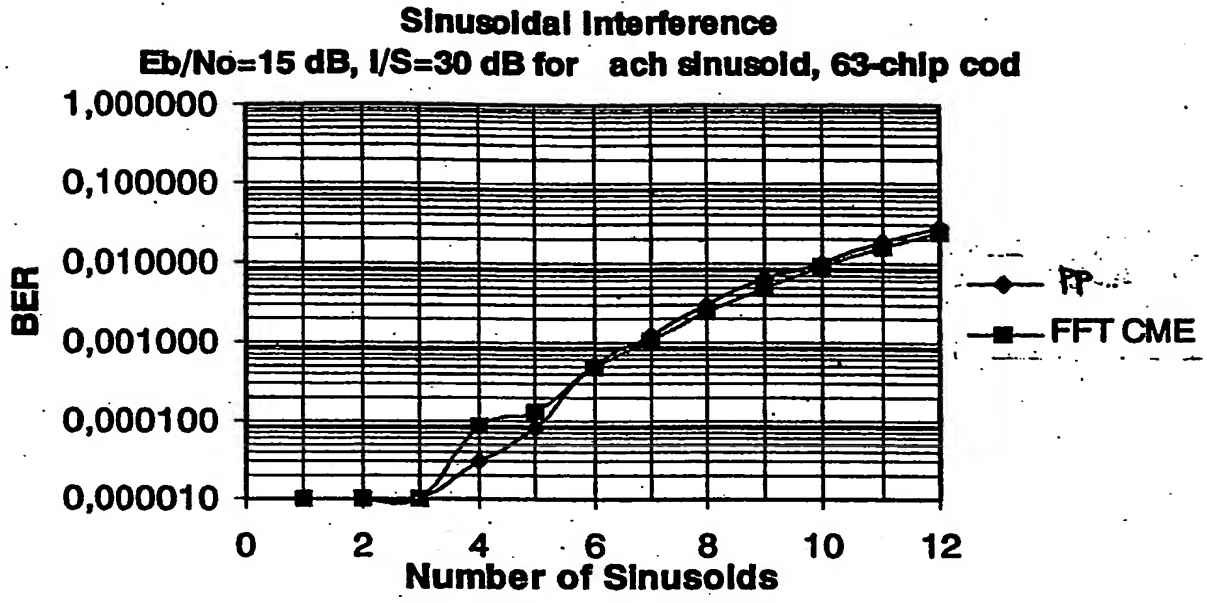


FIG. 8

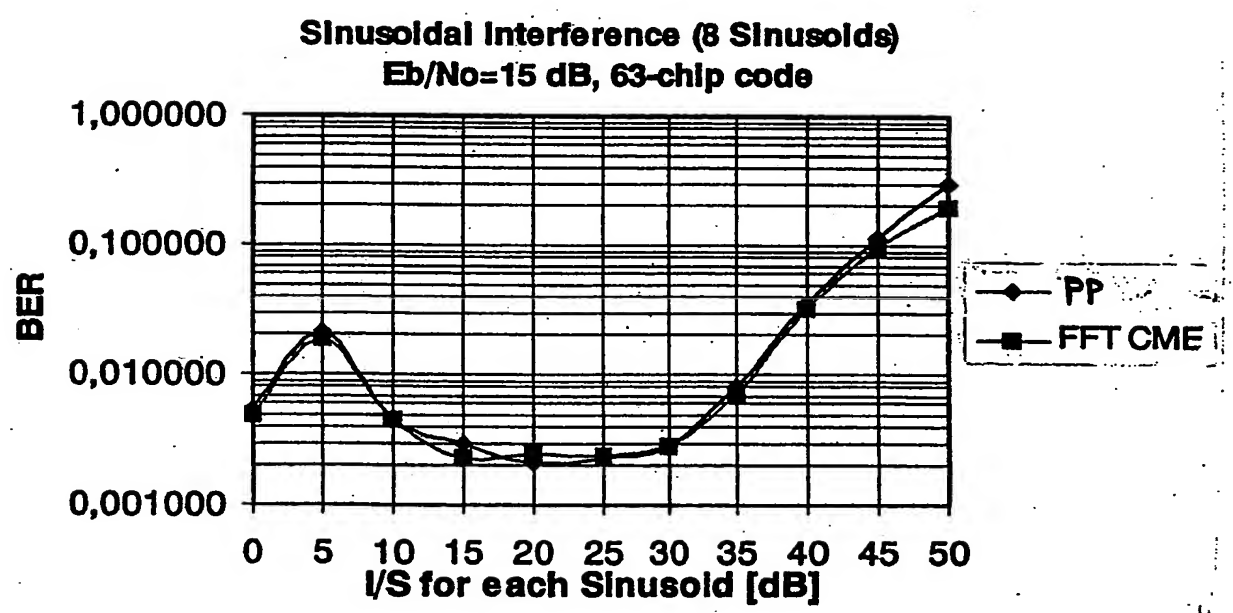


FIG. 9

5/5

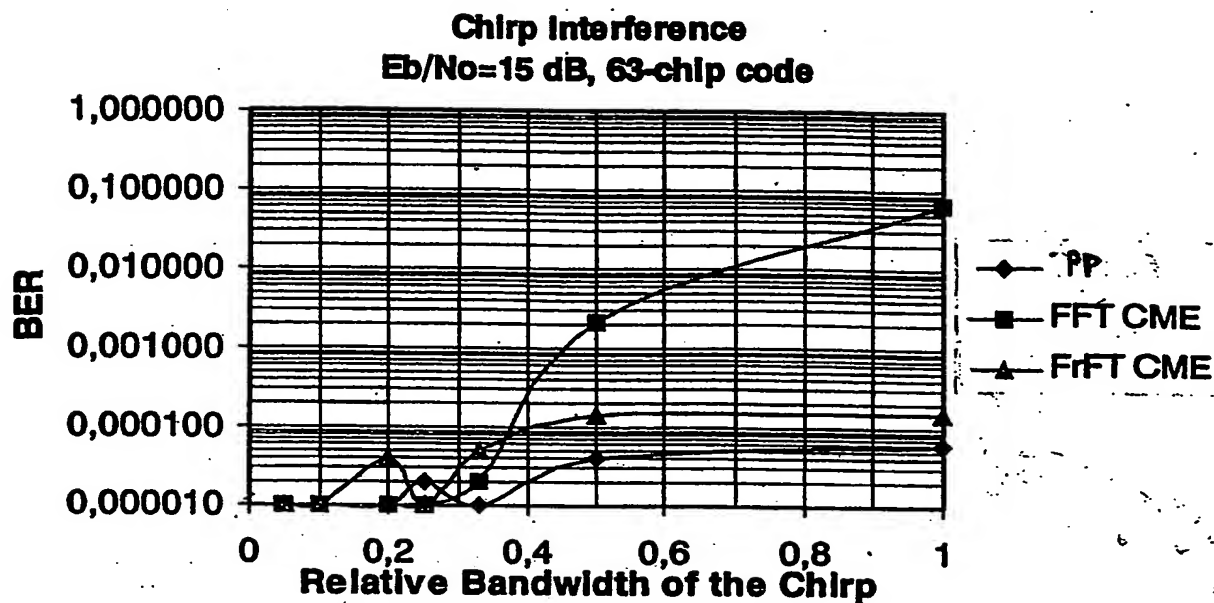


FIG. 10

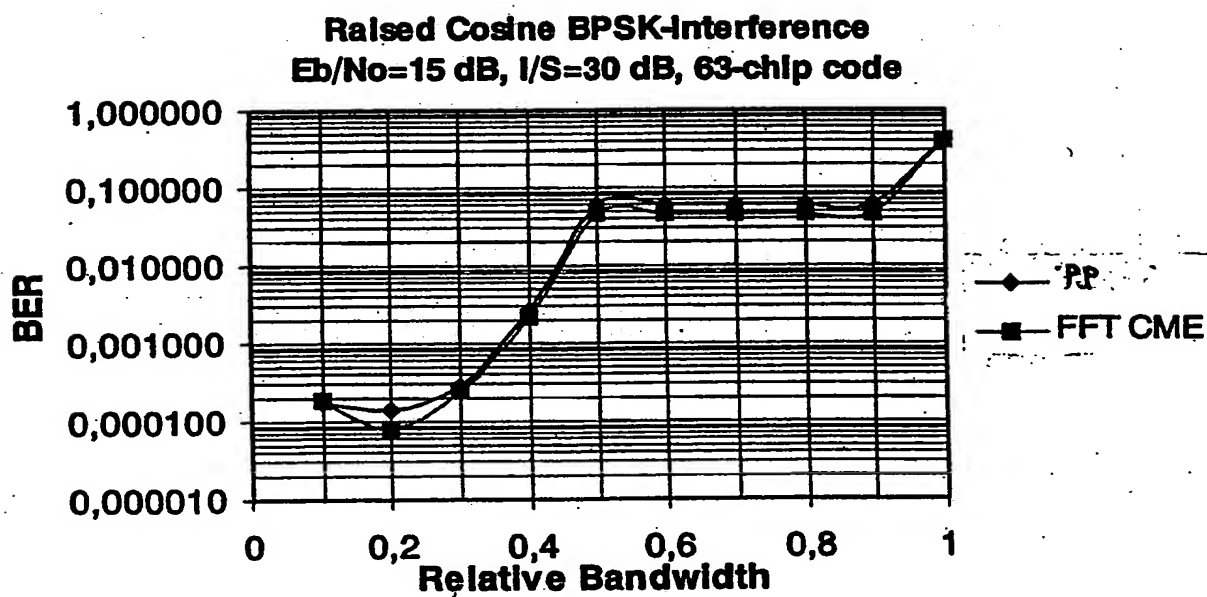


FIG. 11